

FT-7000

High Speed Flask Transfer

Stability Precision Control

Technical Specification

Model
FT-7000

Overall weight
Approx. 90kg



Operating speed range
400 containers per minute

Finger spacing options
20 fingers at 4 1/2" spacing
15 fingers at 6" spacing
12 fingers at 7 1/2" spacing
10 fingers at 9" spacing

Container size limits
4 1/2" spacing - 70mm max major axis
6" spacing - 105mm max major axis
7 1/2" spacing - 125mm max major axis
9" spacing - 150mm max major axis

Drive requirements
Standard Sheppee transfer
drive or equivalent

Service requirements
Connection to centralised
Lincoln lubrication system
(if applicable)

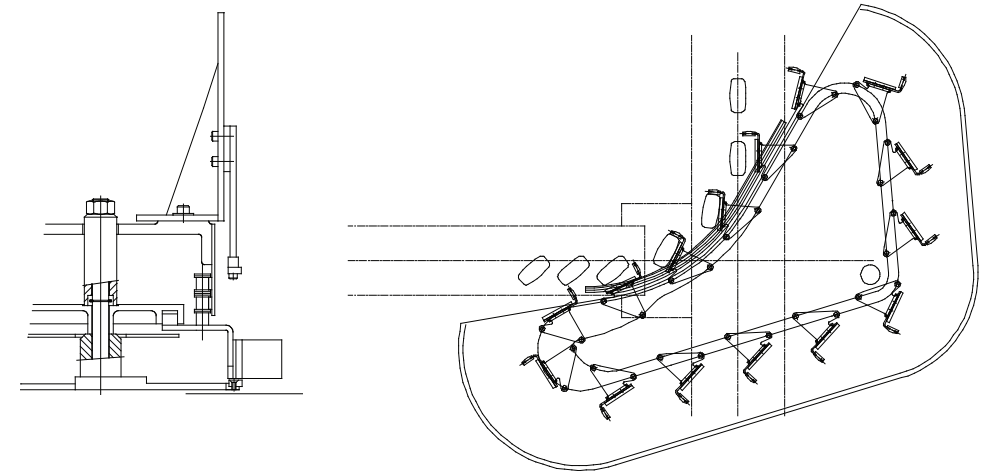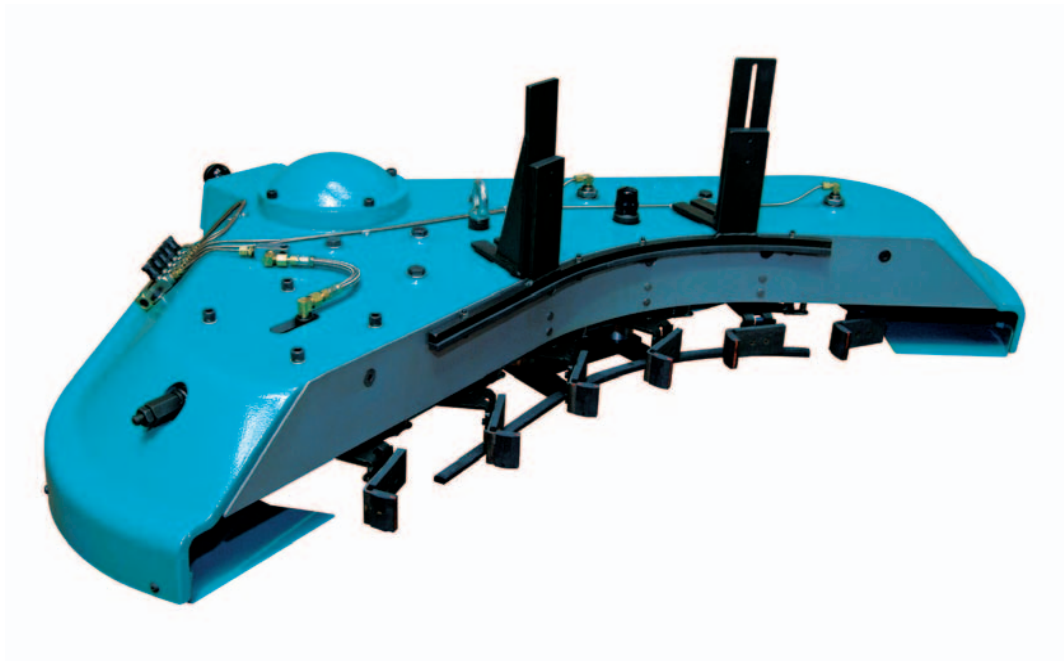

Brief customer reference list

- O-I Alloa – Great Britain
- Rockware – Great Britain
- Redfearn – Great Britain
- HNG – India
- Saint Gobain – Germany
- Sklostroj – Czech Republic
- Gallo Vidro – Portugal
- Gerresheimer - Belgium
- Avirunion – Czech Republic