

# FTR-7000

Flexible Flask Transfer

## Efficient Increased Production

### Technical Specification

**Model**  
FTR-7000

**Overall weight**  
Approx. 100kg



**Operating speed range**  
400bpm

**Finger spacing options**  
24 fingers at 4 1/2" spacing  
18 fingers at 6" spacing  
16 fingers at 6 3/4" spacing  
12 fingers at 9" spacing

**Container size limits**  
68mm at 4 1/2" spacing  
95mm at 6" spacing  
110mm at 6 3/4" spacing  
140mm at 9" spacing

**Drive requirements**  
Standard Sheppee transfer drive or equivalent

**Service requirements**  
Connection to centralised Lincoln lubrication system

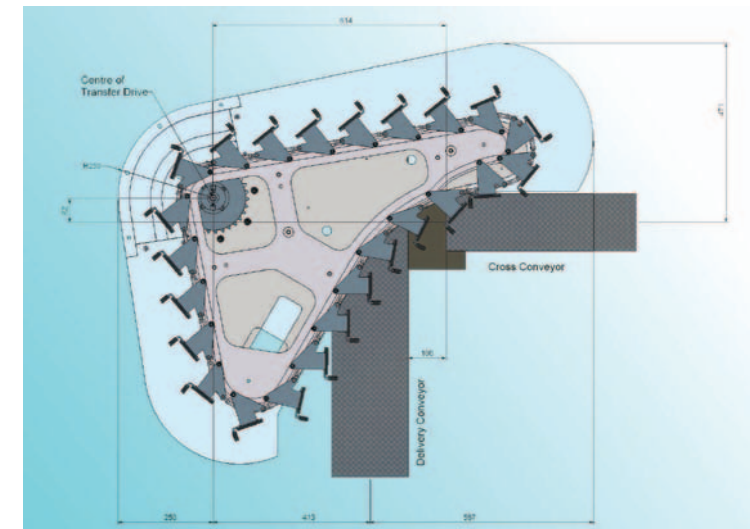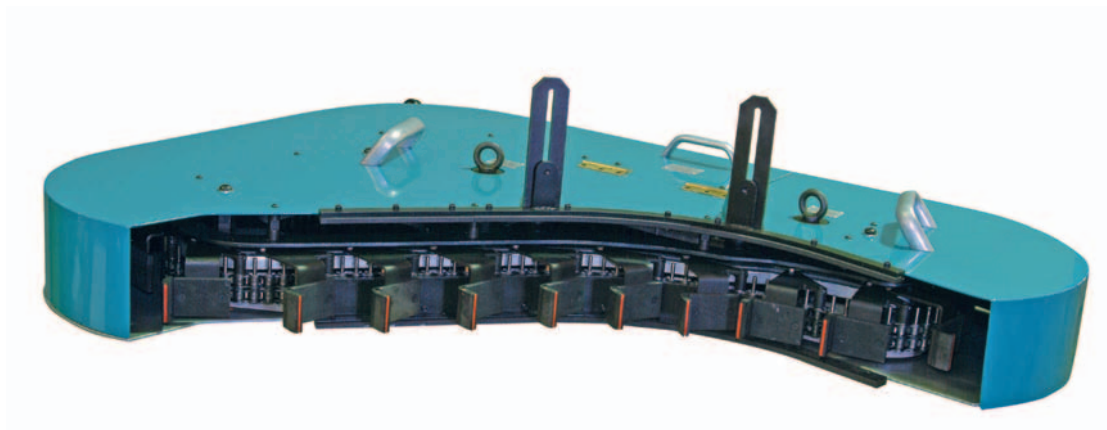

### Features and Benefits

- Presents containers at 45 degrees, therefore increasing stability by approximately 350%
- Four finger spacing configurations
- Transfers containers from 20mm diameter to 140mm diameter
- Adjustable top and bottom ware guides
- Potential 100% payback within one week
- Enhanced container stability at all speeds
- Increased production efficiencies due to dedicated and unique transfer design
- Minimal spares holding required
- Provides space between rows at the cold end, providing optimum spray protection