

VFT-1000

Very Fast Transfer Unit

Efficient Increased Production

Technical Specification

Model
VFT-1000

Overall weight
147kg

Operating speed range
1000+ containers per minute max


Finger spacing options
*53 fingers at 3" spacing
42 fingers at 3¾" spacing
35 fingers at 4½" spacing
30 fingers at 5¼" spacing
21 fingers at 7½" spacing
15 fingers at 10½" spacing
14 fingers at 11¼" spacing
10 fingers at 15¾" spacing

Container size limits
3" spacing - max Ø 52mm
3¾" spacing - max Ø 68mm
4½" spacing - max Ø 78mm
5¼" spacing - max Ø 90mm
** 7½" spacing - max Ø 120mm

Drive requirements
Sheppee ITD-8000

Service requirements
Connection to Lincoln
Centralized Lubrication System
(if applicable)

* Please note non standard chain length required.
** Please note for spacing 7½" and above with bottle Ø120mm and over a minimum gap of 60mm between containers required.

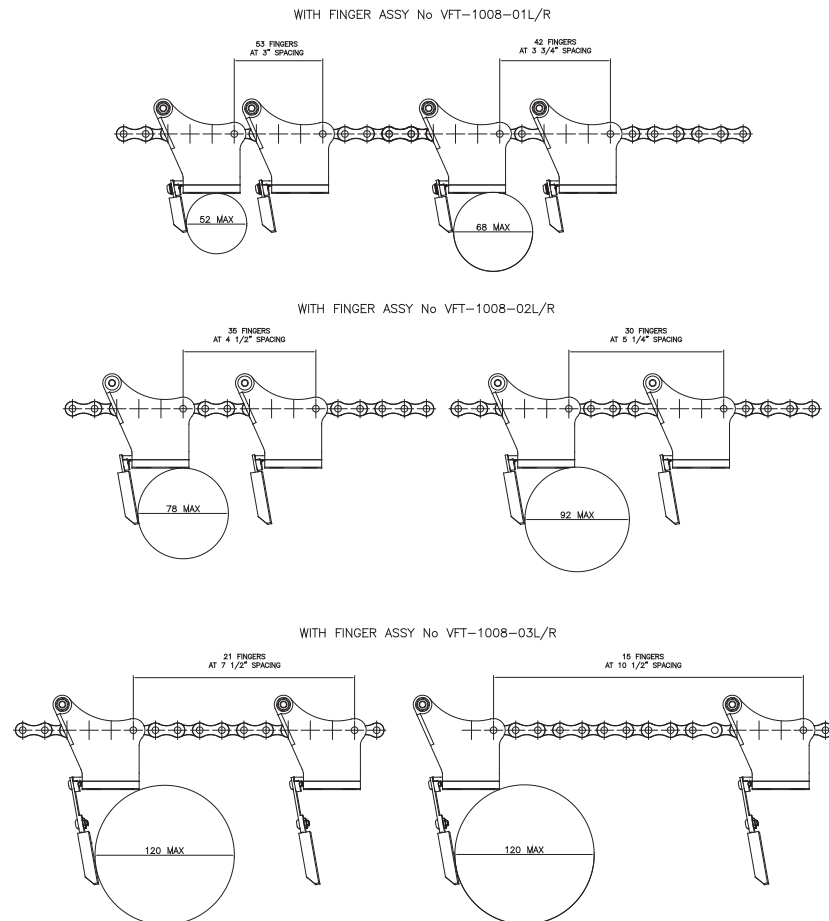

Features and Benefits

- Three finger spacing configurations
- Bolt on or vulcanised insulation intergration
- Transfers containers up to 55mm diameter
- Adjustable top and bottom ware guides
- Reduced job set up time
- Enhanced container stability at all speeds
- Reliable cross conveyor stability
- Minimum spares holding